

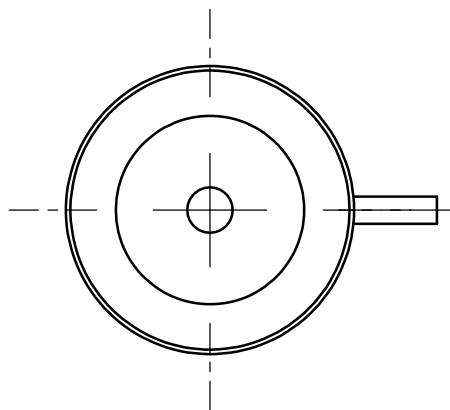
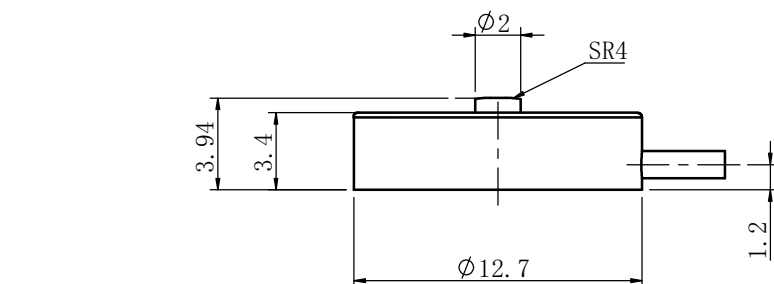


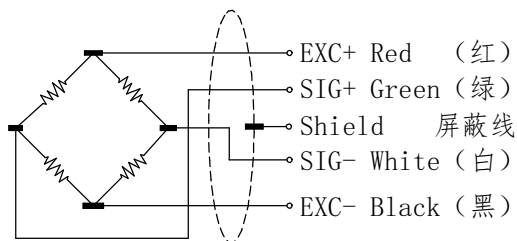

受力示意

配线图



参数	Specifications	技术指标/Technique
额定量程	Capacity	5, 10, 20, 50kg
输出灵敏度	Reted output	1.5±15mV/V
零点输出	Zero Balance	±0.05mV/V
蠕变	Creep (30min)	≤0.5%F. S.
非线性	Non-linearity	≤0.5%F. S.
滞后	Hysteresis	≤0.5%F. S.
重复性	Repeatability	≤0.2%F. S.
输入电阻	Input impedance	800~1100 Ω
输出电阻	Output impedance	800~1100 Ω
温度灵敏度漂移	Temp.effect on output	0.05%F. S. /10℃
零点温度漂移	Temp.effect on zero	0.05%F. S. /10℃
绝缘电阻	Insulation resistance	≥5000M Ω /100V (DC)
激励电压	Recommended excitation	5~10V
最大激励电压	Maximum excitation	15V
温度补偿范围	Compensated Temp Range	-10~60℃
工作温度范围	Operating Temp Range	-20~80℃
安全过载	Safe overload	150%F. S.
极限过载	Ultimate overload	200%F. S.
电缆线尺寸	Cable size	Φ1.2x3000mm
产品重量	Weight	0.1kg
材料	Material	Stainless steel/不锈钢

未标偏差注极限偏差数值					第一角画法		费波斯测量技术（常州）有限公司 FIBOS Measurement Techonlogy (CHANGZHOU) CO.,LTD	
尺寸分段	f (精密级)	m (中等级)	k (粗级)	N (最粗级)				
0-6	±0.05	±0.1	±0.2	±0.5			品名: FA103	
6-30	±0.1	±0.2	±0.5	±1			重量:	
30-120	±0.15	±0.3	±0.8	±1.5	比例	1: 1	版本	A2
120-400	±0.2	±0.5	±1.2	±2.5	设计			图号:
400-1000	±0.3	±0.8	±2	±4	审核			材料:
1000-2000	±0.5	±1.2	±3	±6	批准			料号:
2000-6000	±1	±2	±4	±8				